

10593003

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
29 September 2005 (29.09.2005)

PCT

(10) International Publication Number  
**WO 2005/090894 A1**

(51) International Patent Classification: **F41H 7/02**

[KR/KR]; 497-5 Mok 2-dong, Yangcheon-gu, Seoul 158-052 (KR).

(21) International Application Number:  
PCT/KR2005/000783

(22) International Filing Date: 18 March 2005 (18.03.2005)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
10-2004-0018936 19 March 2004 (19.03.2004) KR

(71) Applicant (for all designated States except US): **LG CABLE LTD.** [KR/KR]; 159 Samsung-dong, Kangnam-gu, Seoul 135-090 (KR).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **KIM, Tae-sung** [KR/KR]; 220-206 Sanbon Jugong Apt., Geumjeong-dong, Gunpo-si, Gyeonggi-do 435-050 (KR). **WON, Yong-hee**


(74) Agent: **AJU INTERNATIONAL LAW & PATENT GROUP**; 12th Floor, Poonglim Building, 823-1 Yeoksam-dong, Kangnam-gu, Seoul 135-784 (KR).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH,

[Continued on next page]

(54) Title: SEPARABLE RUBBER TRACK OF TANK

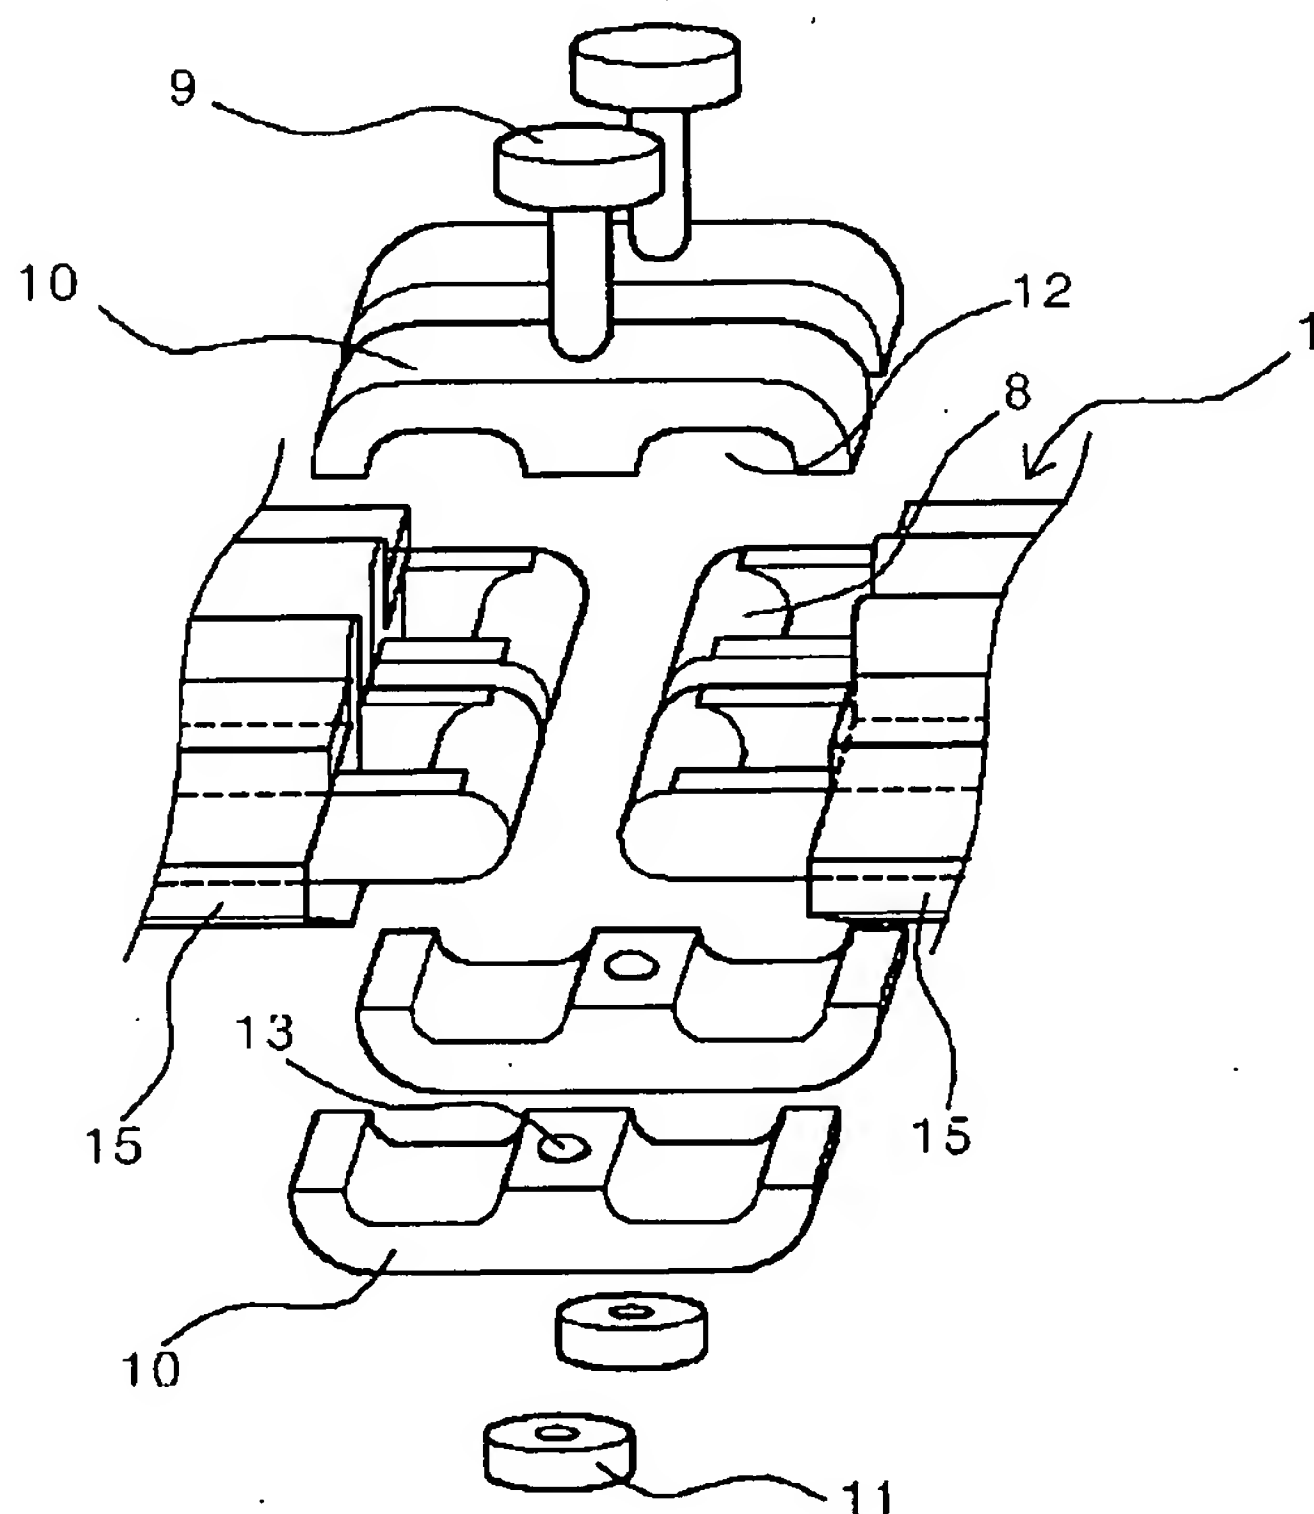

(57) Abstract: The present invention relates to a separable rubber track used in a tank. The rubber track is divided into a plurality of track units. A pair of connection cores connected to steel cores is provided on both ends of the track unit. The track units are connected to each other through coupling members rotatably combined with the connection cores to form an integrated endless track. Therefore, when a part of rubber molding is damaged during operation, it is possible to easily replace the damaged part with a new one. Therefore, it is possible to remarkably reduce time and expenses spent on maintaining and repairing the rubber track, to prolong the life of the rubber track, and to conveniently replace the damaged part on site.

WO 2005/090894 A1



GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

**Published:**

— with international search report

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*